
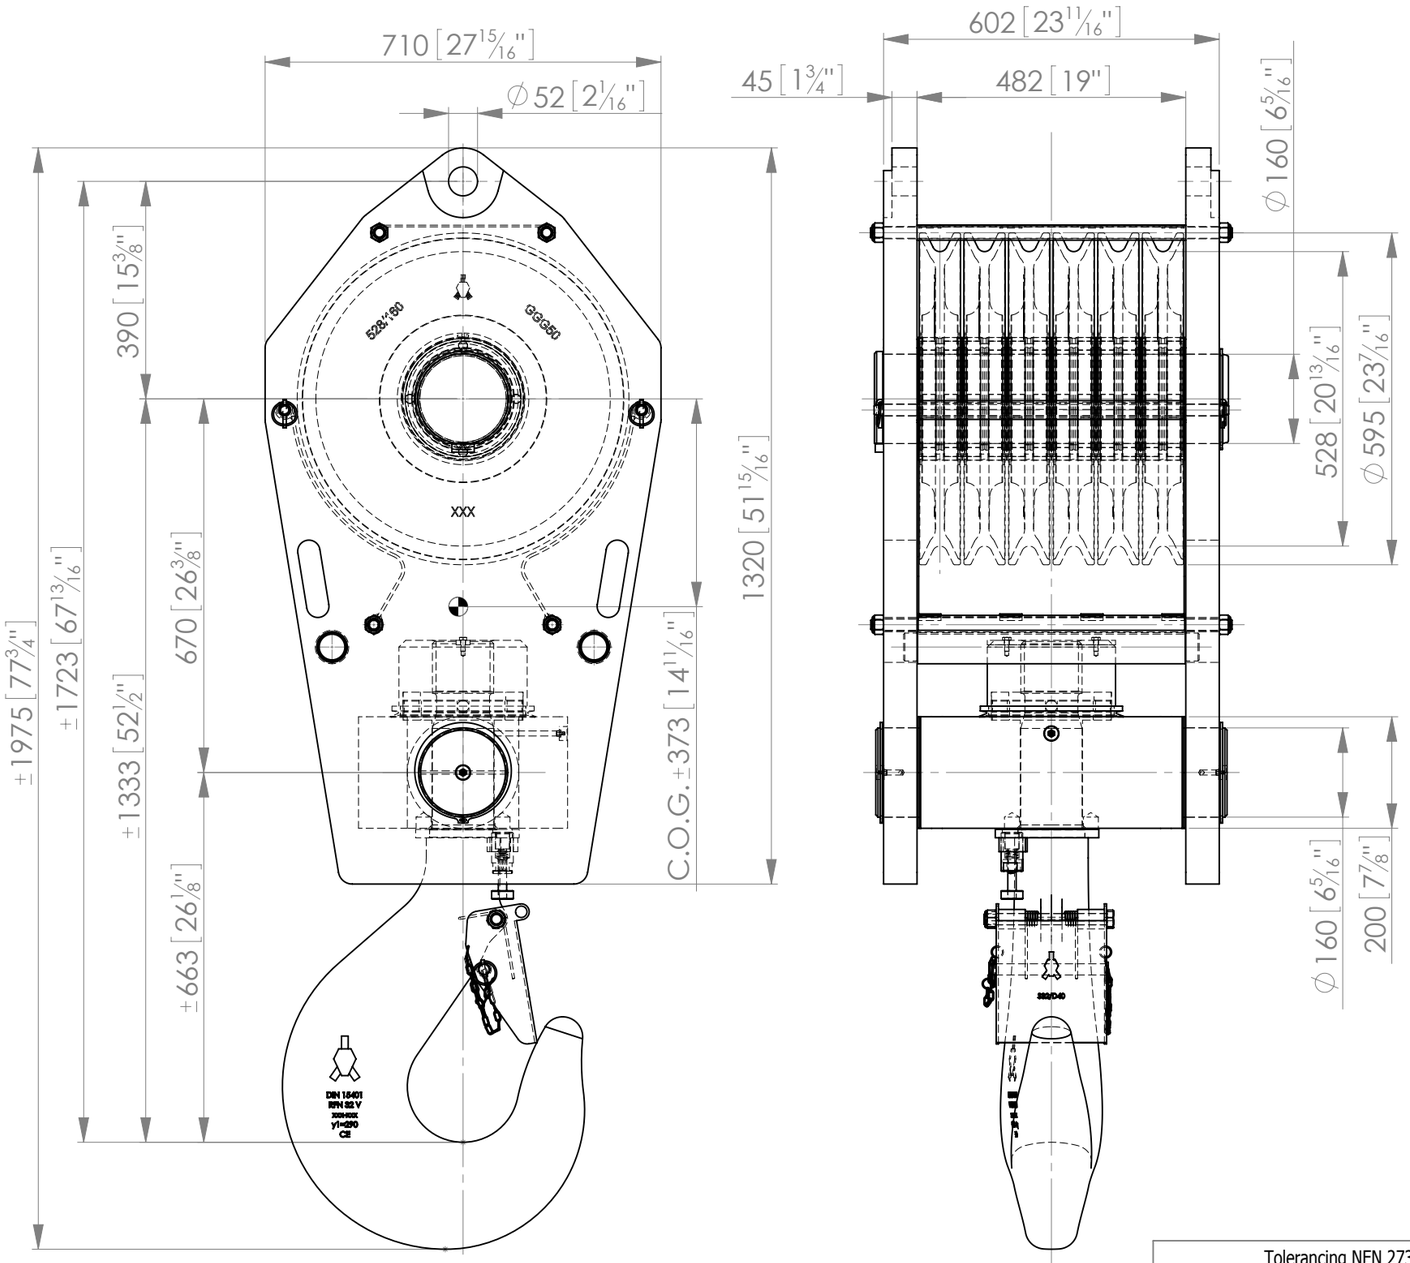


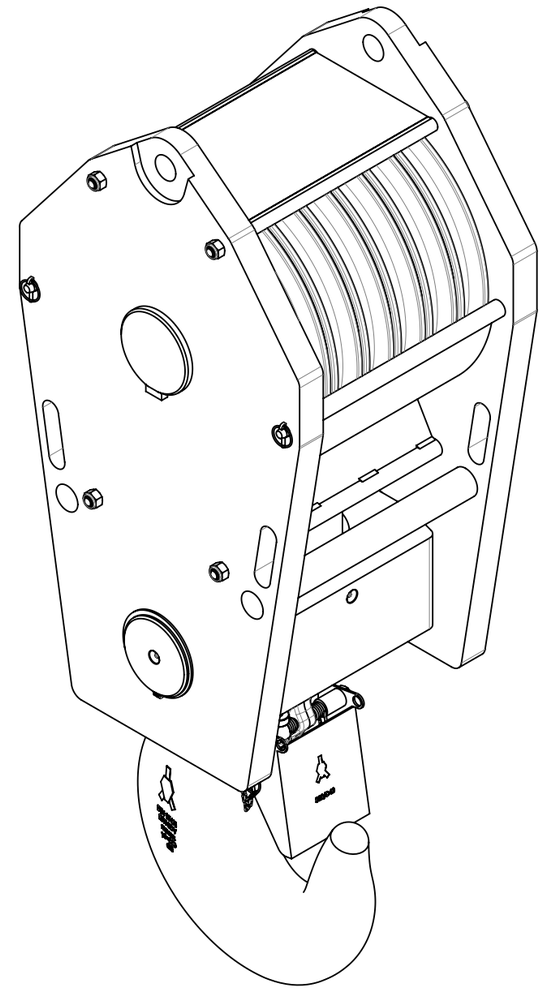

Ropeblock code:	FRB 528.26.6.137,5.E	SWL/WLL:	137,5 Mtons [150 UStons]
Customer ID:	-	Dynamic factor:	-
Wire rope:	ø26 mm [1"]	Load group:	1Bm DIN 15400
Hook size:	32V acc. DIN 15401	Design Acc.:	RB Standard, S.F. 4:1
Target weight:	± 1591 kg [± 3500 lbs]	Personnel lift SWL/WLL:	-

Tolerancing NEN 2731 Ⓔ Tolerances acc. ISO 2768-mK-Ⓔ / ISO 13920-AE	GPS - geometrical tolerancing acc. ISO 1101 Limits and fits acc. ISO 286	Surface texture acc. ISO 1302

Title:

CRANEBLOCK WLL 137,5 Mtons [150 UStons]


ROPEBLOCK
P.O. BOX 391
7570 AJ OLDENZAAL
THE NETHERLANDS
TEL: (+31)541-532300
FAX: (+31)541-522617
www.ropeblock.com

Drawn: PO	Date: 04-10-11	Projection:	
Checked:	Material: -		
Units: mm	Theoretical weight: 1616.5 kg	Sheet: 1 / 2	
Format: A3	Treatment: -		
Scale: 1:11	Drawing Number: R113233-30	Revision: 00-A	

Rev. Description:	Rev. Date:	Rev. by:
Position locking device changed	22-02-12	SO

THIS DOCUMENT AND ALL INFORMATION AND DATA DISCLOSED HEREIN OR HEREWITH ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF ROPEBLOCK AND ARE NOT TO BE USED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART BY OR TO ANYONE WITHOUT THE WRITTEN PERMISSION OF ROPEBLOCK.

POS.	QTY.	Drawing Number	Title	Material
1	1	01.32.V.E.338.B	Single hook nr. 32V acc. DIN 15401	34CrNiMo6
2	1	02.32.V.81230	HOOKNUT 32V - 81230	34CrNiMo6
3	1	03.200.111.478.64	TRAVERSE FRB 528.28.6.150	S355J2N
4	6	04G.528.160.13,5	SHEAVE 528/160 R13,5 - MACHINING	GGG 50
5	1	05K.160.605	SHAFT ø160 FRB 528.26.6.150	34CrNiMo6
6	2	06.528.60.150	CHEEKPLATE FRB 528.26.5.150	S355J2N
7	2	12A.20.636	STUD FRB 528.26.6.150	AISI 304
8	2	13.20.649	BAR FRB 528.26.6.150	C22
9	2	14.25.482.648	HINGEBAR FRB 528.26.6.150	S355J0
10	2	18.528.482	REEVEGUIDE FRB 528.28.6.150	S235J0
11	1	19.300.482	TOPPLATE FRB 528.28.6.150	S235J0
12	1	21.230.25.8	RETAINER 230x25x8	S235J0
13	2	25.60.530	PROTECTOR-SHAFT FRB 528.26.5.150	C22
14	1	33.25.20.39	LOCKING GEAR ø25	S235J0
15	1	34.32.15.100	LOCKING PLATE HOOK 32	S355J2N
16	1	41.15.15.40	NOTCH 15x15x40mm	S235J0
17	3	50.160.4	CIRCLIP 160 A - DIN 471	Steel
18	6	54.160PP	Bearing SL04 160PP	Steel
19	1	54.81230	Bearing 81230	Steel
20	8	55.EV.20	Nyloc Nut M20 - DIN 985	8.8
21	2	56.EV.08.20	BOLT M8x20 - DIN 933	8.8
22	1	61.220A	Dirtseal 220A	NBR
23	4	63.6	Safety pin ø6	Galvanized Steel
24	1	64.32.E.B	Heavy duty safety latch kit for S32/D40 - DIN 15401/2	Acc. Spec.
25	3	66.10.01	Lubrication nipple M10x1 - DIN 71412	Steel

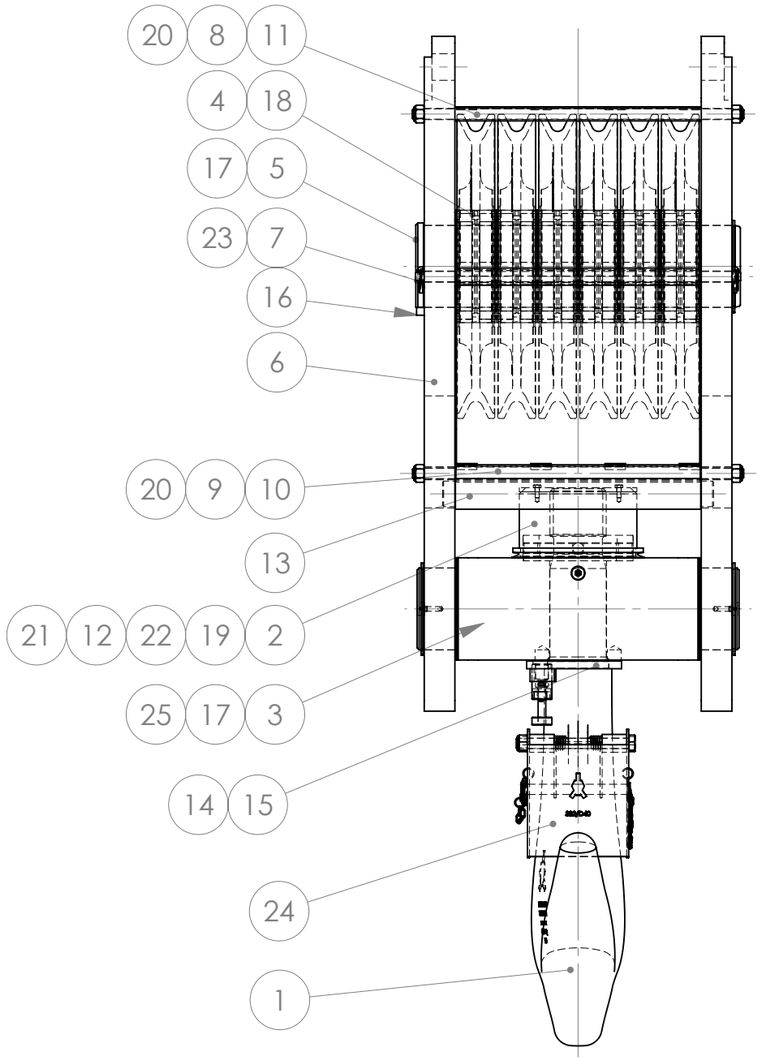

Tolerancing NEN 2731 (E)
Tolerances acc. ISO 2768-mK-(E) / ISO 13920-AE

GPS - geometrical tolerancing acc. ISO 1101
Limits and fits acc. ISO 286

Surface texture acc. ISO 1302

Title:

CRANEBLOCK WLL 137,5 Mtons [150 UStons]

ROPEBLOCK
P.O. BOX 391
7570 AJ OLDENZAAL
THE NETHERLANDS
TEL: (+31)541-532300
FAX: (+31)541-522617
www.ropeblock.com

Drawn: PO	Date: 04-10-11	Projection:	
Checked:	Material: -		
Units: mm	Weight: 1616.5 kg		
Format: A3	Treatment: -	Sheet: 2 / 2	
Scale: 1:12	Drawing Number: R113233-30	Revision: 00-A	

Rev. Description:	Rev. Date:	Rev. by:
Position locking device changed	22-02-12	SO

THIS DOCUMENT AND ALL INFORMATION AND DATA DISCLOSED HEREIN OR HEREWITH ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF ROPEBLOCK AND ARE NOT TO BE USED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART BY OR TO ANYONE WITHOUT THE WRITTEN PERMISSION OF ROPEBLOCK.